

# HYDRO-RAIN®

Built for Speed™

# HRS 200

In a world of heavy, abusive lawn equipment, only the tough survive. That's why Hydro-Rain® set out to create the most rugged, durable spray head on the market—a head with a “bring it on” attitude and a body that can take whatever you throw at it.

The new HRS 200 is that spray head.

Hands down, it's the heaviest-duty product of its kind. The facts speak for themselves: the wide cap is made with almost 50% more material than the nearest competitor; the wiper seal is the industry's largest; the body is made of ultra-strong ABS 709 ... and that's just the beginning. Top to bottom, inside and out, this head sets a new standard for long-lasting reliability under even the harshest conditions and most punishing treatment—hat means fewer callbacks and replacements.

## FEATURES AND BENEFITS

- **Greater Strength**—47% more cap than the industries leading spray head brand
- **Co-molded, TPR pressure-activated wiper seal**—Minimizes flow-by with an industry leading seal and cleans debris from stem
- **Two-piece ratchet stem mechanism**—Makes lining up the spray pattern to match the landscape quick and effortless
- **Stainless steel retraction spring**—Insures reliable retraction and durability
- **Constructed with high-impact ABS 709**—Stands up to the elements for years of dependable performance
- **Installation flexibility**—6" and 12" models feature side and bottom inlets
- **Pre-installed Hydro-Rain® flush cap**—Pull-tab design makes nozzle installation easy while directional flow path makes flushing quick and easy
- **Top performance and full flexibility nozzles**—Hydro-Rain® HRN 200 adjustable arc nozzles rotate 0°–360°
- **Three-year warranty**—Hydro-Rain® ensures full quality performance for the warranty period or we'll replace it




## MODELS

HRS-200-02-FC	2" SLPU w/Flush Cap
HRS-200-04-FC	4" SLPU w/Flush Cap
HRS-200-06-FC	6" SLPU w/Flush Cap
HRS-200-12-FC	12" SLPU w/Flush Cap

## WITH BLU-LOCK ELBOW

HRS-200-04-BL	4" SLPU w/Flush Cap and Blu-Lock™
---------------	-----------------------------------

## HOW TO SPECIFY

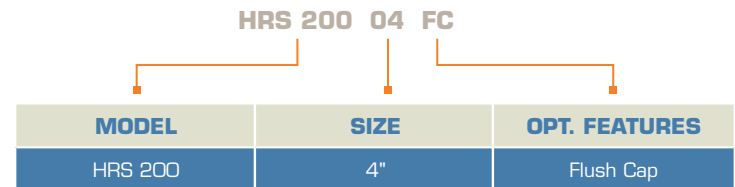

# HYDRO-RAIN®

Built for Speed™

# HRS 200

## BUILT FOR SPEED FEATURES

- Check out the HRS-200-04-BL for the fastest installation in the industry with a pre-installed Blu-Lock swing elbow.

## OPERATING RANGE


- Pressure: 15 to 90 PSI (1.0 to 6.2 bar)
- Spacing: 3 to 20 Feet (0.9 to 6.1 bar)

## SPECIFICATIONS

- Flow-by: 0 at 5 PSI (0.3 bar) or greater
- Dimensions:
  - Models and height
  - HRS-200-02-FC: 4" (10.2 cm) body height; 2" pop-up height (5.1 cm)
  - HRS-200-04-FC: 6" (15.2 cm) body height; 4" pop-up height (10.2 cm)
  - HRS-200-06-FC: 9 3/8" (23.8 cm) body height; 6" pop-up height (15.2 cm)
  - HRS-200-12-FC: 16" (40.6 cm) body height; 12" pop-up height (30.5 cm)
  - Exposed surface diameter: 2 1/4" (5.7 cm)



## INSTALLATION SPECIFICATION DETAIL

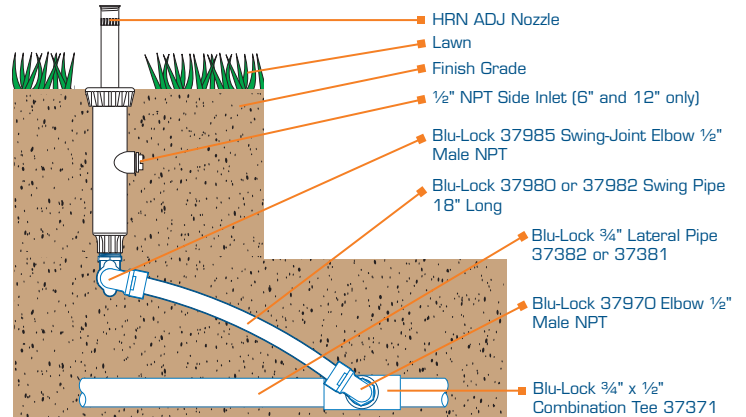

## HRS 200 CUTAWAY

